

Tach Converter Wiring Diagram

Mounting

It is important to mount the converter away from any direct engine heat sources. Make sure the wires reach the kill switch and a 12 volt source.

Wiring

RED- To a switched 12 volt source.


BLACK - Connect to the negative battery terminal.

VIOLET - Connect to the trigger input wire of the tachometer.

BROWN / BLACK - Common ground or Coil Negative.

BROWN / ORANGE - Hunt or Vertex Internal Coil, MSD Pro Mag.

BROWN / YELLOW - Mallory or Vertex External Coil.

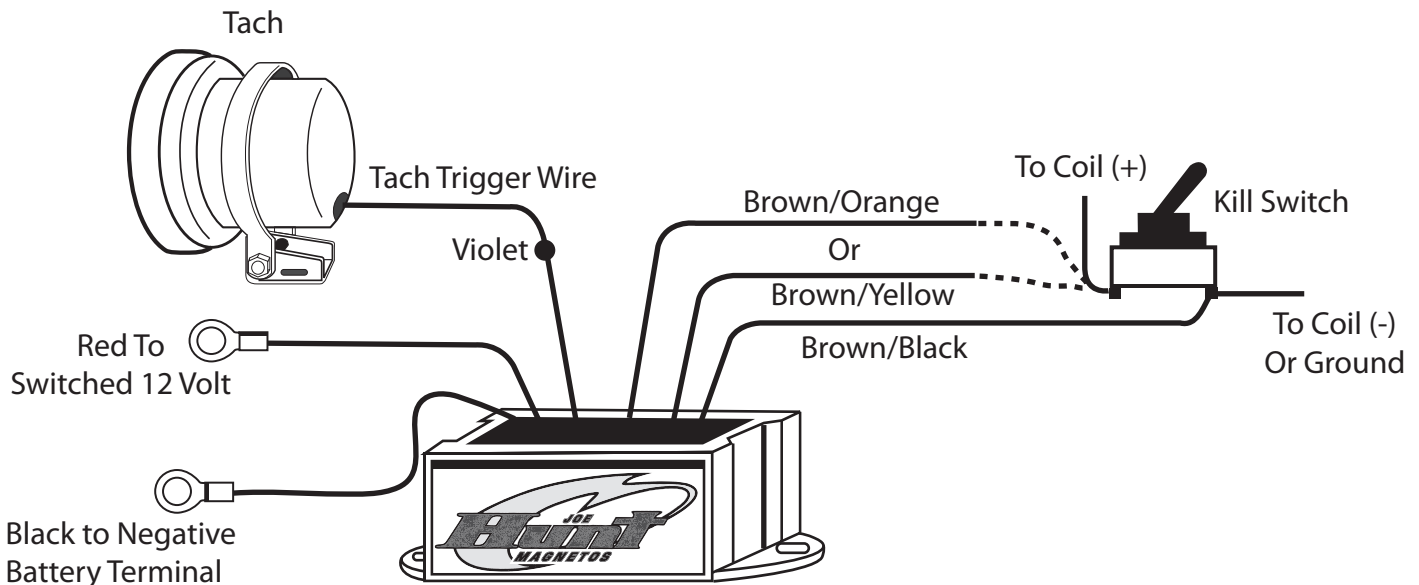

Tip: For Super Mag applications it is recommended that ground straps be connected from both cylinder heads to the magneto clamp.